

PIA DN33 additive fire station



DN33 Additive Fire Station - Safety and Performance in Fire Fighting

Ensure optimum protection of your premises with our **DN33 additive fire station**, a high-performance fire safety device. Designed for fast, effective intervention, this **PIA (Poste d'Incendie Additivé)** combines water and emulsifying liquid, offering enhanced extinguishing capacity on Class B fires (flammable liquids).

Why choose our Additivated Fire Station?

This fire station is **NF** certified (compliant with NF 021 and NF EN 671-1 standards), guaranteeing optimum quality and reliability. Its flow rate is over **130 L/min at 2.5 bar**, with a reach of over **15 meters**, ensuring effective coverage.

Its robust steel construction with epoxy-polyester resin coating provides excellent durability and resistance to corrosion. It features a **swiveling reel that rotates 180°** for optimum maneuverability.


The **PIA support is available as an option**, offering additional installation flexibility. This model is compatible with various industrial, commercial and ERP (Établissements Recevant du Public) environments.

PIA DN33 technical specifications

- Pivoting and rotating reel with axial feed.
- Pre-mixer adjustable to 3% or 6% with non-return valve.
- 20 m or 30 m semi-rigid hose compliant with NF EN 694 standard.
- Handheld nozzle foam low expansion.
- Cabinet-free installation for easy access and rapid use.

- With or without foam additive in 25-liter cans (see possible variations)

| Specifications | P.I.A DN33/20 | P.I.A DN33/30 | P.I.A DN33/30 + Emulsifier |
|------------------|---|---------------|----------------------------|
| Item no | 32601 | 38967 | 40979 |
| Nominal diameter | 33 mm | | |
| Pipe length | 20 m | 30 m | |
| Dimensions in mm | | | |
| Height A | 1095 | | |
| Width B | 700 | | |
| Depth C | 445 | | |
| Connection D | 1" 1/2 M | | |
| Flow | > 130 l/min at 2.5 bar at handheld nozzle | | |
| Range | > 15 m at 2.5 bar at handheld nozzle | | |
| Empty weight | 33 kg | 41 kg | |
| NF certification | Handheld nozzle foam low expansion: RC/03/001 | | |

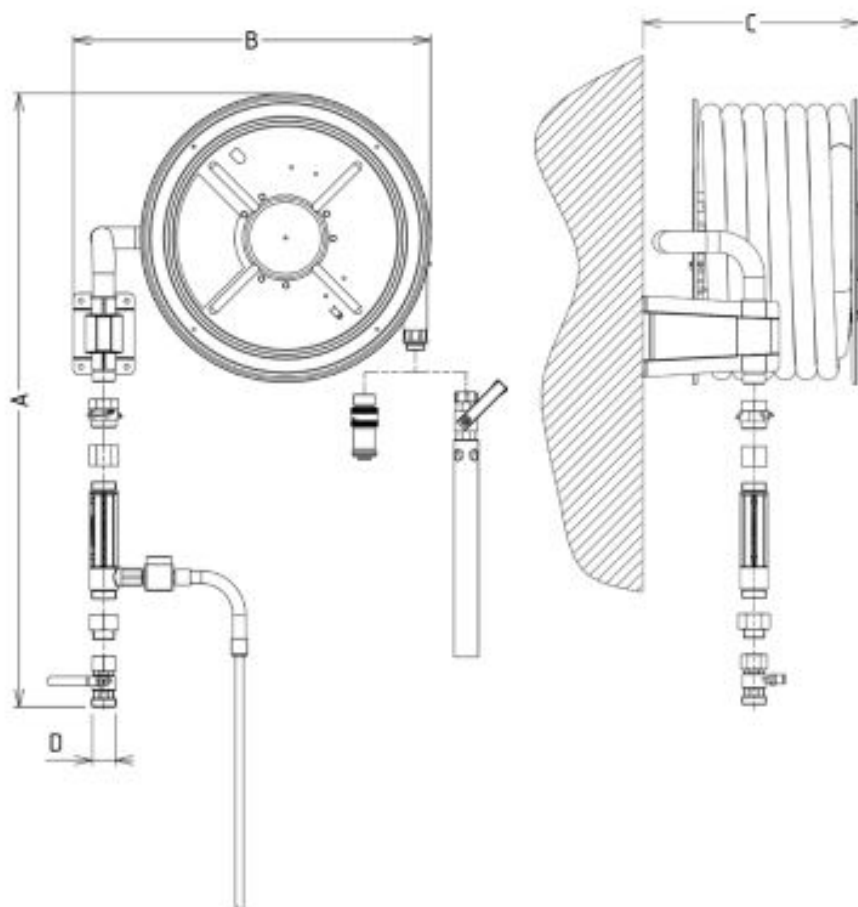

Installation and maintenance

Our **additive fire extinguishers** are easy to install, thanks to their removable wall-mounted system. Regular maintenance is compulsory in accordance with **NF EN 671-3** and APSAD R5 to ensure proper operation.

Order your customized fire station now!

Protect your facilities with certified, high-performance equipment. [Contact us](#) to find out more about our fire safety solutions tailored to your needs.