


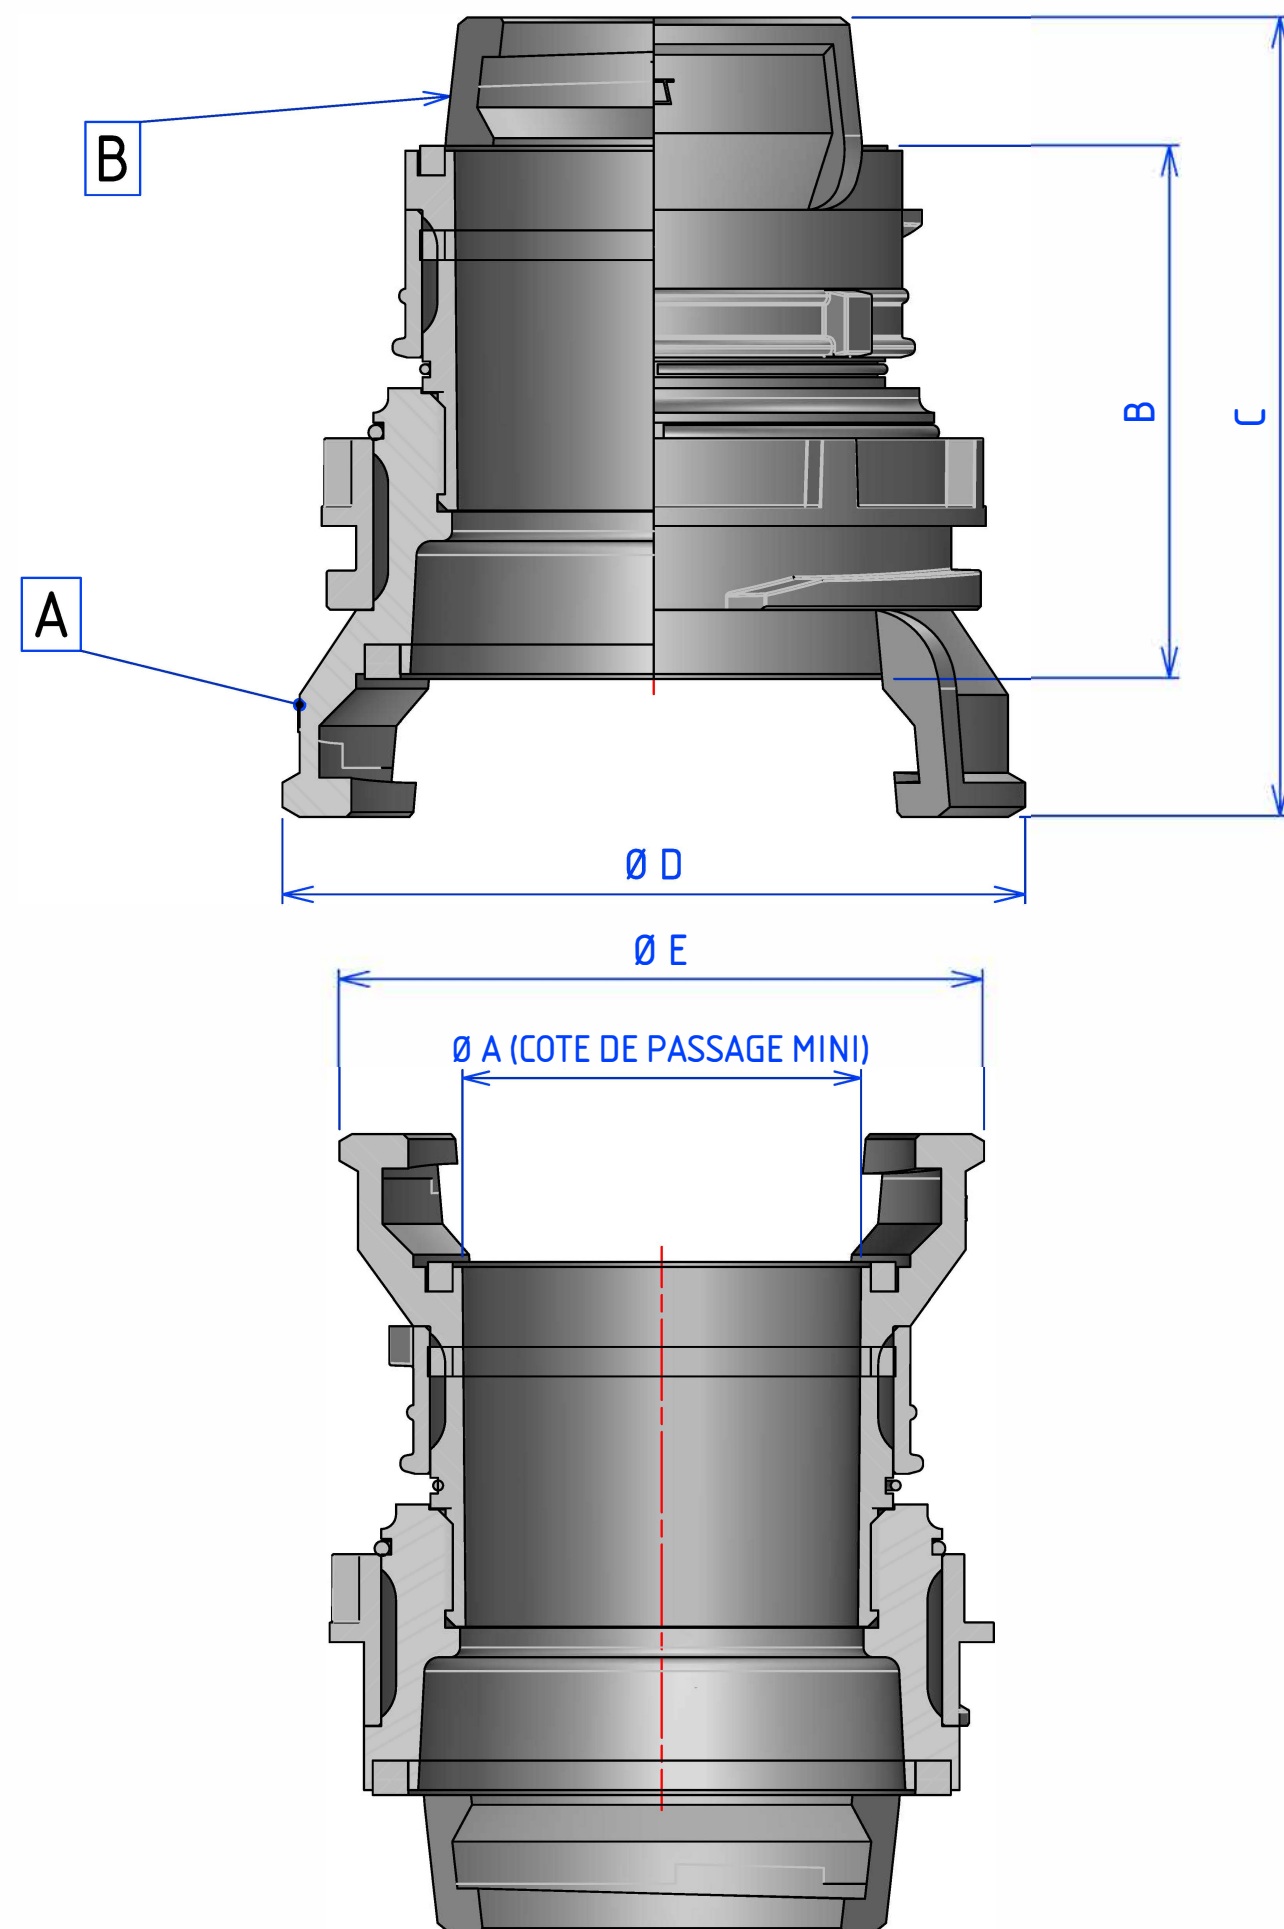

SUIVANT LES MODELES LES REDUCTIONS PEUVENT AVOIR DIFFERENTES CONCEPTIONS

DN A	DN B	REFERENCES	Ø A	Ø B	COTE C	Ø D	Ø E	POIDS	-
40	20	20177	20	93	123.5	75	47	0.26	-
40	25	40832	24	92.5	124	75	54	0.275	-
40	32	21297	30	97.5	128.5	75	62.5	0.28	-
50	40	39284	39	87	127	92.5	75	0.43	-
50	32	21492	30	108	144	92.5	62.5	0.42	-
50	25	40833 SUR DEMANDE	39	87	126	92.5	75	0.42	-
65	50	20951	50	96	141	109.5	92.5	0.65	-
65	40	20833	39	90	129.5	109.5	75	0.59	-
80	65	20950	64.5	112	161	131.5	109.5	0.925	-
80	50	20638	50	110.5	159	131.5	92.5	0.97	-
80	40	22010	39	102	146	131.5	75	0.885	-
100	80	21161	91	109.5	164	151	131.5	1.378	-
100	65	21095	65	100.5	150	151	109.5	1.32	-
100	50	21030	50	103	152	153	92	1.23	-
100	40	23538	40	91	138	151	75	1.15	-
125	100	40859	97	163	219	193	148	2.72	-
150	100	40860	100	226	293	238	151	4.95	-
150	125	SUR DEMANDE	126	148	213	240	192	4.52	-
200	150	SUR DEMANDE	146	179	256	289	240	8.32	-
-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-

MATIERE : AS7G06 T6	FICHE TECHNIQUE	
JOINT NBR BLANC EN STANDARD	MMF MMF Protection et Sécurité 672 rue des Mercières – Parc des Mercières – 69140 Rillieux-La-Pape – FRANCE Tél. : +33 (0)4 78 00 00 25 – Email : mmf@mmf.fr – www.mmf.fr	
PIECES CONFORME NF E 29572 COTES HORS NORMES INDICATIVES	RACCORD REDUCTION	A